


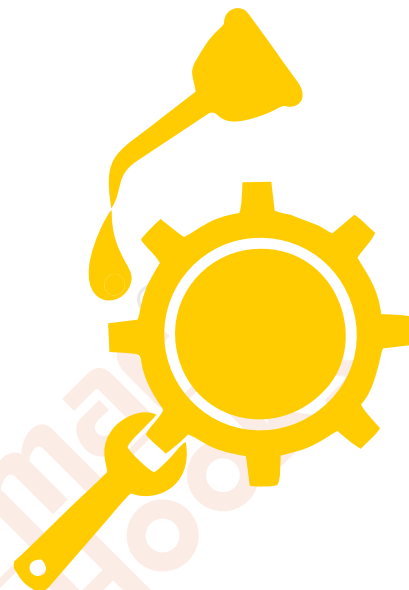

Maintenance of Hooks:

Affix this Hook on your sewing Or embroidery machine with Light machine Lubrication oil to remove rust preventive coating on its race-way and run machine idle for one minute with high speed.

And again repeat this procedure after every work shift (Approx. 8 hour) to remove thread debris which becomes abrasive and reduce service life of Hooks and also sewing machine. For vanishes clothes and thread residual completely, if possible then spray compressed air by removing bobbin case and bobbin.

This will reduce friction between inner shuttle and hook and increase service life of hook. This instruction can follow on any types of hook whether it is coated or not but day to day cleaning of sewing machine will add days and months in its service life.